

DIY Quantum GPS Logger V2 - USB serial cable

Used parts:

Plug




Molex PicoBlade™
1.25mm Pitch
Connector, four pins



USB To RS232 TTL with PL2303HX Auto Converter Module
Converter Adapter WIN7 Modul

Wiring:

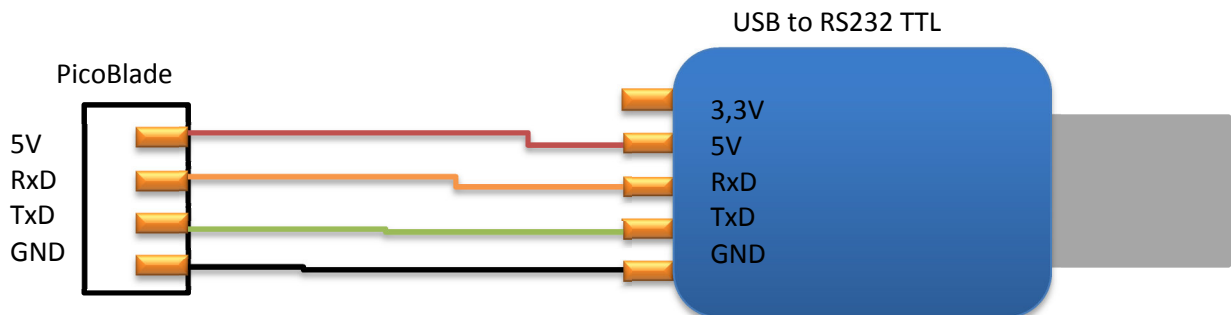

You get the NMEA data with a serial terminal program. When receiving data the blue LED is flashing.

Transmitted NMEA data are RMC, VTG, GGA, GSA, GSV and GLL.